

Publication 84-DM31-640
Issued June 1984
Revision A, August 1986

BIT PAD TWO
DATA TABLET

Technical Reference

Summagraphics Corporation
777 State Street Extension
Fairfield, CT 06430 U.S.A.

Phone: (203) 384-1344
Telex: 96-4348

LIMITED WARRANTY ON MEDIA, MANUALS, AND SOFTWARE

If you discover physical defects in the software media or in the manuals distributed with the software, Summagraphics Corporation will replace the media or manuals at no charge to you, provided you return the item to be replaced with proof of purchase, including purchase date, to Summagraphics or to an authorized Summagraphics dealer during the 90-day period after you purchased the software. In some countries the replacement period may be different; check with your authorized Summagraphics dealer.

Software, in the context of this warranty, can be in any form, including firmware.

Even though Summagraphics has tested the software, SUMMAGRAPHICS MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS SOFTWARE, ITS QUALITY, PERFORMANCE, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS SOFTWARE IS SOLD "AS IS", AND YOU, THE PURCHASER, ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND PERFORMANCE.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED, IN FACT OR IN LAW. No Summagraphics dealer, agent, or employee is authorized to make any modification, extension or addition to this warranty.

Summagraphics reserves the right to make changes to the software or its documentation without notice. IN NO EVENT WILL SUMMAGRAPHICS BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT IN THE SOFTWARE OR ITS DOCUMENTATION (including but not limited to typographical, arithmetic or listing errors), even if advised of the possibility of such damages. In particular, Summagraphics shall have no liability for any programs or data stored in or used with Summagraphics's products, including the costs of recovering such programs or data.

Some states do not allow the exclusion or limitation of implied warranties or liability for

incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

LIMITED WARRANTY ON HARDWARE

Summagraphics warrants to the original purchaser that this equipment, including its components and parts, shall be free from defects in material and workmanship for a period of ninety (90) days from the date of shipment. Summagraphics' obligation under this warranty shall be limited to repair or replacement, at the option of Summagraphics, Fairfield, Connecticut. Return of a repaired instrument shall be F.O.B. Summagraphics, Fairfield, Connecticut. The above warranty is contingent upon normal usage and does not cover products which have been modified without Summagraphics' approval or which have been subjected to unusual physical or electrical stress or on which the original identification marks have been removed or altered. The above warranty will not apply if adjustment, repair, or parts replacement is required because of accident, neglect, misuse, failure of electric power or air-conditioning, humidity control, transportation, or causes other than normal and ordinary usage. To the extent that any of its equipment is furnished by a manufacturer other than Summagraphics, the foregoing warranty shall be applicable only to the extent of the warranty furnished by such other manufacturer. This warranty will not apply to appearance terms, such as knobs, handles, dials, or the like, nor to the pen cartridge or refills of the pen cartridge.

THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. The foregoing obligations are in lieu of all obligations and liabilities, including all warranties of implied or statutory, and state Summagraphics' entire and exclusive liability and Purchaser's exclusive remedy for any claim of damages in connection with the sale or furnishing of all equipment, including design, suitability for use, operation or installation. In no event shall Summagraphics be liable for any special or consequential damages.

COPYRIGHT

This manual and the software described in it are copyrighted with all rights reserved. (Software, in the context of this copyright, can be in any form, including firmware.) Under the copyright laws, this manual or the software may not be copied, in whole or in part, without the written consent of Summagraphics, except in the normal use of the software or to make a backup copy. The same proprietary and copyright notices must be affixed to any permitted copies as were affixed to the original. This exception does not allow copies to be made for others, whether or not sold, but all of the material purchased (with all backup copies) may be sold, given or loaned to another person. Under the law, copying includes translating into another language or format. You may use the software on any computer owned by you, but extra copies cannot be made for this purpose.

Copyright Summagraphics Corporation 1984
All Rights Reserved.
Summagraphics Corporation
777 State Street Ext., Fairfield, Connecticut
06430, U.S.A.

TRADEMARKS

Summagraphics, Bit Pad, Bit Pad One, and Bit Pad Two are trademarks of Summagraphics Corporation.

FCC STATEMENT CONCERNING RFI

The Bit Pad Two digitizer ("the Equipment") generates and uses radio frequencies. If not properly installed and used in strict accordance with Summagraphics's instructions, the Equipment may cause interference with radio or television reception. The Equipment has been tested and found to perform within the Class B limits for a computing device according to the specifications in Subpart J, Part 15 of the Federal Communications Commission (FCC) Rules, designed to provide reasonable protection against such interference in a residential installation.

Accessories or options to the Equipment must be purchased from Summagraphics to ensure compliance with the Class B specification.

Summagraphics Corporation is not responsible for radio or television interference caused by unauthorized modification of the Equipment.

Compliance with Class B specifications does not guarantee that interference will not occur in a particular installation. If it does occur, one or more of the following measures could remedy the problem:

- Re-orient the radio or television receiving antenna.
- Move the Equipment away from the radio or television.
- Plug the Equipment and the radio or television into separate outlets so that they are on different branch circuits.

If necessary, consult the radio or television dealer or an experienced technician. In addition, the booklet *How to Identify and Resolve Radio-TV Interference Problems* may be helpful. This booklet was prepared by the FCC and is available from the U.S. Government Printing Office, Washington, D.C. 20402, Stock No. 004-00-00345-4.

PREFACE

This book provides technical information on the Bit Pad Two data tablet. It assumes you have a general knowledge of computers, computer programming, and interfacing peripherals to a computer.

REVISION INFORMATION

This manual replaces the "MM Bit Pad Technical Reference", publication number 84-DM31-930, issued September 1983.

NOTE TO BIT PAD ONE OWNERS

The Bit Pad Two is a second generation data tablet. Its predecessor is the Bit Pad One. Appendix C of this book highlights the major operating differences between these two models.

Contents

1-1	Chapter 1	Operation Overview
2-1	Chapter 2	Configuration Parameters
2-1	Section A	Proximity Transmission
2-2	Section B	Remote Control
2-2	Section C	Baud Rate
2-2	Section D	CTS Handshaking
2-3	Section E	Hardware Interface
2-3		Connector Pin Assignments
2-5		Signal Levels
2-5	Section F	Report Format and Cursor Output Codes
2-6		Bit Pad Two Packed Binary Format
2-8		Bit Pad ASCII BCD Format
3-1	Chapter 3	Guidelines for Writing a Software Driver
4-1	Chapter 4	Operating Characteristics and Commands
4-2	Section A	Controlling the Report Flow and Content
4-3		Primary Modes
4-3		Stream Mode, Switch Stream Mode, and Report Rate
4-5		Point Mode
4-6		Remote Request Mode
4-6		Stop Mode
4-7		Modifiers
4-7		Absolute Mode
4-8		Relative Mode
4-9		Increment Mode
4-11	Section B	Combining Characteristics
4-12	Section C	Other Commands
4-12		Resolution
4-13		Send Configuration
4-13		Transmission Control
4-14		Reset
4-15		NOP (No Operation)

- 5-1 Chapter 5 Checking the Data Tablet**
- 5-2 Section A Self Test Diagnostic Function
- 5-3 Section B In Case of Failure

- 6-1 Chapter 6 Operating Environment, Installation, Care, and Service**
- 6-1 Section A Operating Environment
- 6-1 Temperature and Humidity
- 6-1 Power
- 6-2 Section B Unpacking and Installation
- 6-2 Unpacking
- 6-3 Installation
- 6-10 Changing the Stylus Refill
- 6-10 Section C FCC Considerations
- 6-11 Section D Care and Cleaning
- 6-11 Section E Service

- A-1 Appendix A Specifications**
- A-1 Physical Description
- A-1 Power Requirements
- A-1 Optional Power Supplies
- A-1 Material and Cosmetics
- A-2 Operating Specifications

- B-1 Appendix B ASCII Conversion Chart**

- C-1 Appendix C How the Bit Pad Two is Different from the Bit Pad One**

- D-1 Appendix D Quick Reference Sheet of Commands and Switch Settings**

Tables

2-3	Table 2-1	RS-232-C Data/Power Cable - Pin Assignments for the 25-pin D Connector
2-4	Table 2-2	RS-232-C Data/Power Cable - Pin Assignments for the 4-pin In-line Connector
2-4	Table 2-3	RS-232-C Reversing Cable - Pin Assignments for the 25-pin D Connector
2-5	Table 2-4	RS-232-C Signal Levels
2-6	Table 2-5	Bit Pad Two Packed Binary Report Format
4-1	Table 4-1	Methods of Operating Characteristic and Function Control
4-4	Table 4-2	Report Rates Relative to Baud Rates for Reports in Binary Format
4-5	Table 4-3	Report Rates Relative to Baud Rates for Reports in ASCII BCD Format
5-2	Table 5-1	Output Format of Self Test Function

Figures

1-1	Figure 1-1	Bit Pad Two Data Tablet
1-3	Figure 1-2	Bit Pad Two's Active Area and Origin
1-4	Figure 1-3	Resolution, Counts of Resolution, Absolute Coordinates, and Relative Coordinates
3-2	Figure 3-1	General Flowchart for Master Program to Read and Process Data Tablet Reports
3-3	Figure 3-2	Detail A: Get and Decode Reports Subroutine
3-4	Figure 3-3	Detail B: Data Input Subroutine
4-10	Figure 4-1	Increment Mode Example
5-1	Figure 5-1	Quick Functional Check of the Data Tablet
6-4	Figure 6-1	Bit Pad Two Components and Accessories
6-5	Figure 6-2	Bit Pad Two Components and Accessories
6-7	Figure 6-3	DIP Switch Locations on the Printed Circuit Board

6-8 Figure 6-4 Stylus Holder Location

6-10 Figure 6-5 Changing the Stylus Refill

Chapter 1 Operation Overview

The Bit Pad Two is a data tablet. A data tablet is an input device. It allows you to translate graphic information into digital information, suitable for a digital device, such as a computer or a computer terminal.

The Bit Pad Two is valuable in many applications, including:

- steering a cursor on a computer terminal;
- picking locations on a menu;
- digitizing maps, drawings, etc.

The parts of a standard Bit Pad Two data tablet are the tablet, cursor or stylus, data/power cable, and power supply, shown in the following illustration:

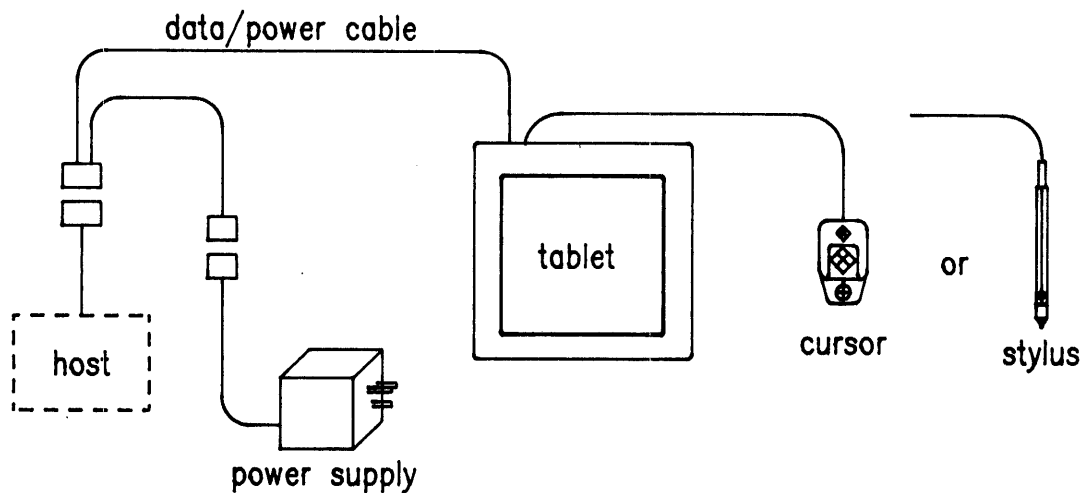


Figure 1-1 Bit Pad Two Data Tablet

- **Tablet:** a table-like surface. The tablet can tilt or lie flat.
- **Cursor:** a puck-like, hand-held device. Use it with the tablet to locate points. A cursor has a cross hair for precisely sighting the points. Cursors are available with three or four buttons.
- **Stylus:** a pen-like, hand-held device. Use it with the tablet to locate points. The stylus has two buttons: one on the outside of the barrel and one inside the barrel, activated by pressing the refill tip. Refills are available in marking and non-marking.
- **Data/power cable:** the cable and connector assembly that interfaces the data tablet to the host and the power supply.
- **Power supply:** the source of power for the Bit Pad Two. It attaches to the data/power cable and your power line.
- **Adapter cables:** the cable assemblies that can change the gender of the data/power cable connector; reverse the communication lines; or convert the power supply plug to the international standards.

The Bit Pad Two translates the position of the stylus or cursor on the tablet into digital information and communicates the digital information to the host. The host is usually a computer or computer terminal. The stylus or cursor position is expressed as an X,Y coordinate pair. One coordinate pair is called a **report**.

Reports can only be collected when the stylus or cursor is in the tablet's **active area** and is in **proximity**. The active area is the area on the tablet surface in which cursor or stylus positions can be identified. Note its location in the illustration below:

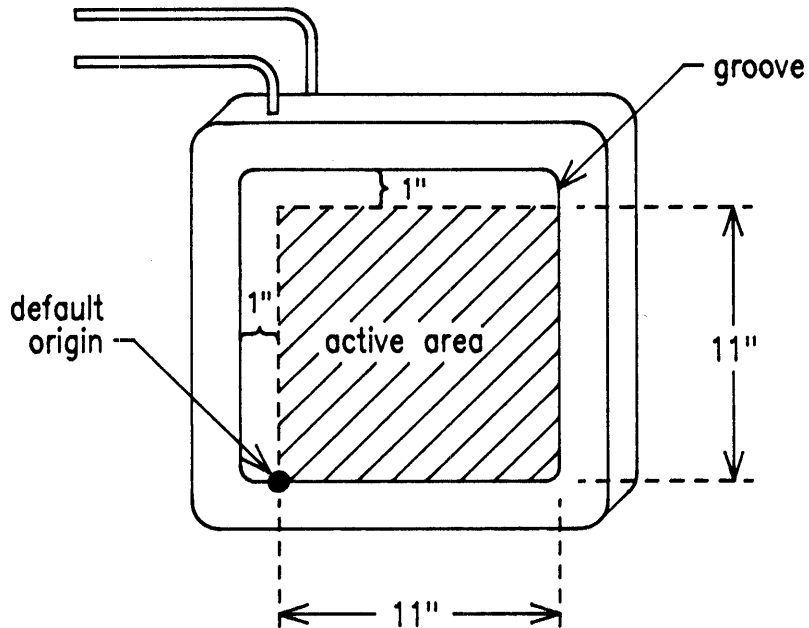


Figure 1-2 Bit Pad Two's Active Area and Origin

Proximity is the maximum distance above the active area that the cursor or stylus can be held and report a valid position. This, in effect, establishes a three-dimensional volume, within which the cursor or stylus can issue valid reports. Reports issued from outside of this volume are **out of proximity** (out-of-prox) and, therefore, do not represent the current position of the stylus or cursor.

Reports are in counts of resolution, expressed as absolute coordinates or relative coordinates, depicted in the following illustration:

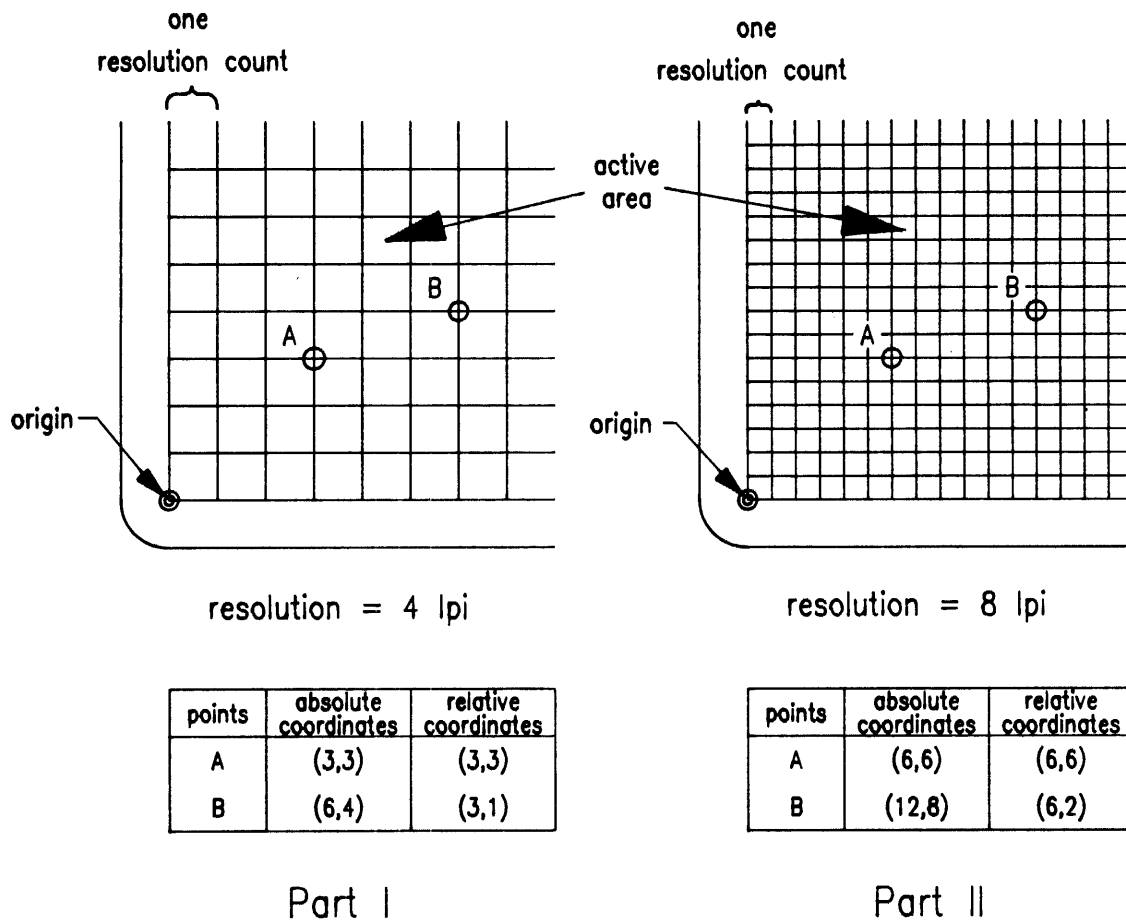


Figure 1-3 Resolution, Counts of Resolution, Absolute Coordinates, and Relative Coordinates

Resolution is the smallest distance or movement that the data tablet can distinguish. Resolution is a measure of precision and is expressed in lines per inch (lpi) or lines per millimeter (lpmm).

Counts of resolution is a unit of measure: one count is the distance between two lines of resolution. In Figure 1-3, points A and B are in the same physical location,

but their coordinates are different. This is because the resolution in Part I is 4 lpi, and the resolution in Part II is 8 lpi.

Absolute coordinates are coordinates measured from the the tablet's **origin** (0,0). **Relative coordinates** are measured "relative to" the last report location. In Figure 1-3, point B is reported after point A. Therefore, point B in relative coordinates is reported as relative to point A. Reports are in absolute coordinates when the data tablet is in Absolute Mode. Reports are in relative coordinates when the data tablet is in Relative Mode.

Absolute Mode and Relative Mode are two of the Bit Pad Two's many operating characteristics. Other operating characteristics govern when reports are issued; how fast they are issued; and the tablet resolution.

The operating characteristics can be set by commands from the host or by switches. The switches, slide or rocker, are grouped in banks of eight per DIP switch. The DIP switches are located on the printed circuit board inside the tablet.

Also established by switch are the data tablet's configuration parameters. These parameters specify the data communications, such as CTS handshaking and baud rate, and the data format.

So that the Bit Pad Two will be operable upon arrival at your facility, the switches are set at the factory. The factory settings appear in the Quick Reference Sheet at rear of this book.

Chapter 2 Configuration Parameters

For successful communication between a Bit Pad Two and its host, the hardware interface and configuration parameters must be compatible. The hardware interface is RS-232-C. The configuration parameters are:

- proximity transmission
- remote control
- baud rate
- CTS handshaking
- report format and cursor output codes

This chapter describes the alternatives available for each of the configuration parameters. The parameters are switch-selective. Appendix D, "Quick Reference Sheet of Commands and Switch Settings", summarizes the switch settings and the defaults that the factory normally uses.

SECTION A PROXIMITY TRANSMISSION

The data tablet can be configured to:

- transmit reports only when the cursor or stylus is in proximity; or
- transmit reports regardless of whether the cursor or stylus is in or out of proximity.

If the data tablet is configured the second way, reports issued from out-of-prox will reflect that state with a special bit or character. Reports in the binary format have a bit assigned to report the proximity status. Reports in the ASCII BCD format use the cursor/stylus flag character to identify an out-of-prox report.

SECTION B REMOTE CONTROL

The data tablet can be configured to accept commands from the host or not. When remote control is enabled, the data tablet is receptive to commands from the host.

When remote control is disabled, the data tablet only responds to the following commands:

ASCII Command	Function
T	remote request trigger
NUL	Reset
XOFF	Stop Transmission
XON	Start Transmission
ENQ	Send Configuration
SP (space)	no operation
CR	no operation

Each of these functions is described in Chapter 4.

SECTION C BAUD RATE

Baud rate is the number of bits transmitted each second between host and peripheral (Bit Pad Two) or peripheral and host. The available baud rates are 110, 150, 300, 1200, 2400, 4800, 9600, and 19200.

SECTION D CTS HANDSHAKING

The Bit Pad Two supports CTS (Clear To Send) handshaking, a hardware governed method of communications control. The Bit Pad Two is configured as a DTE (Data Terminal Equipment). Therefore, RTS (Request to Send) and DTR (Data Terminal Ready) are always asserted.

If the switch is set to enable CTS handshaking, the data tablet awaits CTS from the host before it can issue reports. If CTS is not asserted, the data tablet is inhibited from sending reports.

If the switch is set to disable CTS handshaking, the data tablet ignores the CTS line.

SECTION E HARDWARE INTERFACE

The Bit Pad Two has an RS-232-C interface. It is full duplex, asynchronous, and serial. See the sections below for the pin assignments and signal levels.

CONNECTOR PIN ASSIGNMENTS

The data/power cable is a single, shielded cable terminated with a 25-pin female D connector and a 4-pin male in-line connector. The D connector plugs into the host. The in-line connector plugs into the power supply. The pin assignments appear below:

Table 2-1 RS-232-C Data/Power Cable - Pin Assignments for the 25-pin D Connector

Pin	Wire Name	Description
1	shield	protective, frame ground
2	TXD	transmit data from Bit Pad Two to host
3	RXD	receive commands from host to Bit Pad Two
4	RTS	Request To Send
5	CTS	Clear To Send
7	signal ground	return for serial data
20	DTR	Data Terminal Ready

Pins 1 and 7 are jumpered together.

Table 2-2 RS-232-C Data/Power Cable - Pin Assignments for the 4-pin In-line Connector

Pin	Wire Name	Description
1	shield	protective, frame ground
2	-12V supply	power: 100 mA at +/-5%
3	+12V supply	power: 300 mA at +/-5% regulation or better
4	signal ground	return for power

An adapter cable is available to change the connector gender from female to male. Also, a reversing cable is available to reverse the communications lines; its pin assignments appear below:

Table 2-3 RS-232-C Reversing Cable - Pin Assignments for the 25-pin D Connector

Pin	Wire Name	Description
1	shield	protective, frame ground
2	RXD	receive commands from host to Bit Pad Two
3	TXD	transmit data from Bit Pad Two to host
4	RTS	Request To Send
5	CTS	Clear To Send
7	signal ground	return for serial data
20	DTR	Data Terminal Ready

Pins 1 and 7 are jumpered together.

SIGNAL LEVELS

The table below specifies the signal levels for data transmissions:

Table 2-4 RS-232-C Signal Levels

RS-232-C Interface	Interchange Voltage	
	-3V to -12V	+3V to +12V
Binary states	1	0
Signal condition	Mark	Space

The source of Table 2-4 is the "EIA Standard RS-232-C: Interface Between Data Terminal Equipment and Data Communication Equipment Employing Serial Binary Data Interchange", by the Engineering Department of the Electronic Industries Association (Washington, D.C.: EIA, 1969).

SECTION F REPORT FORMAT AND CURSOR OUTPUT CODES

Two report formats are available, packed binary and ASCII BCD.

(To users of other Summagraphics data tablets or digitizers: The formats described here are specific to the Bit Pad Two and Bit Pad One. Other Summagraphics products have similarly named formats, but their content may be different.)

Regardless of format, reports are in counts of resolution, not in inches or millimeters. (Counts of resolution is described in Chapter 1.)

Within the report format:

- you can opt to have parity enabled or not;
- if parity is enabled, it can be even or odd;
- you can select the number of stop bits to be one or two; and
- you have two cursor output codes to choose from.

The Bit Pad Two is normally configured at the factory in the ASCII BCD report format with parity enabled (set for even parity), two stop bits, and cursor output A.

BIT PAD TWO PACKED BINARY FORMAT

The packed binary formats are different for reports issued when the data tablet is in Absolute Mode versus Relative Mode. Absolute Mode has 12 bits per coordinate. Relative Mode has 11 bits and one sign bit per coordinate.

Table 2-5 Bit Pad Two Packed Binary Report Format

Stop Bits	MSB	7	6	5	4	3	2	1	0	LSB	Start Bit	Transmission Sequence
SB	P	PH	Fd	Fc	Fb	Fa	0	PR	0			1st byte
SB	P	0	X5	X4	X3	X2	X1	X0	0			2nd byte
SB	P	0	X11	X10	X9	X8	X7	X6	0			3rd byte
SB	P	0	Y5	Y4	Y3	Y2	Y1	Y0	0			4th byte
SB	P	0	Y11	Y10	Y9	Y8	Y7	Y6	0			5th byte

Key to Table 2-5:

- LSB least significant bit
- MSB most significant bit
- PR proximity, 0 when in proximity and 1 when out-of-prox
- F flag bit, identifying the stylus or cursor buttons being pressed. The cursor output codes are switch-selective:

Stylus Buttons	Output Code			
	Fd	Fc	Fb	Fa
none	0	0	0	0
tip	0	0	0	1
barrel	0	0	1	0
tip & barrel	0	0	1	1

3-button Cursor Buttons*	4-button Cursor Buttons	Output A Code				Output B Code			
		Fd	Fc	Fb	Fa	Fd	Fc	Fb	Fa
none	none	0	0	0	0	0	0	0	0
1	1	0	0	0	1	0	0	0	1
2	2	0	0	1	0	0	0	1	0
—	3	0	1	0	0	0	0	1	1
3	4	1	0	0	0	0	1	0	0

* On the 3-button cursor, the buttons are distinguished by raised dimples, rather than by numbered labels. In the table above, 1 corresponds to one dimple; 2 to two dimples, etc.

PH phasing bit, which is always 1

P parity bit

SB one or two stop bits

X0 to X11
and
Y0 to Y11 X and Y coordinate bits.

Note: In Relative Mode, X11 and Y11 are the sign bits. The bit is 0 for a positive coordinate and 1 for a negative coordinate. Furthermore, the remaining bits for a negative coordinate are in the two's complement form.

BIT PAD TWO ASCII BCD FORMAT

When the data tablet is in Absolute Mode, the ASCII BCD report format is:

XXXX,YYYY,F<CR> or XXXX,YYYY,F<CR><LF>

When the data tablet is in Relative Mode, the ASCII BCD report format is:

SXXX,SYYY,F<CR> or SXXX,SYYY,F<CR><LF>

As shown in the above formats, the terminator can be a carriage return (<CR>) or a carriage return and a line feed (<LF>). This is switch-selective.

Note: The character 9 is in the cursor/stylus flag position when a report is issued from out-of-prox.

Key:

- S coordinate sign, in Relative Mode only. For a positive coordinate, the character can be 0 through 9. For a negative coordinate, the character is a minus sign (-).
- X a digit of the X coordinate, where each digit is an ASCII character, 0 through 9
- ,
- Y a digit of the Y coordinate, where each digit is an ASCII character, 0 through 9
- F flag character, identifying the stylus or cursor buttons being pressed. The cursor output codes are switch-selective:

Stylus Buttons	Output Code	3-button Cursor Buttons*	4-button Cursor Buttons	Output Code A	Output Code B
none	0	none	none	0	0
tip	1	1	1	1	1
barrel	2	2	2	2	2
tip & barrel	3	—	3	4	3
out-of-prox	9	3	4	8	4
		out-of-prox		9	9

* On the 3-button cursor, the buttons are distinguished by raised dimples, rather than by numbered labels. In the table above, 1 corresponds to one dimple; 2 to two dimples, etc.

<CR> ASCII carriage return

<LF> ASCII line feed

Chapter 3 Guidelines for Writing a Software Driver

If the Bit Pad Two is connected to a computer, rather than to a terminal, the computer must have a driver for the Bit Pad Two. The driver is a software subroutine that collects and decodes Bit Pad Two reports for use by another (master) program. This section provides some guidelines, in the form of flowcharts, for writing a driver.

The flowcharts are for a Bit Pad Two using the packed binary report format. The steps are general for any set of operating characteristics. Figure 3-1 is a flowchart of the overall driver. Figures 3-2 and 3-3 are subroutine details.

Note: In the context of these charts, "normalize" means to combine the two coordinate bytes into the format required by your master program.

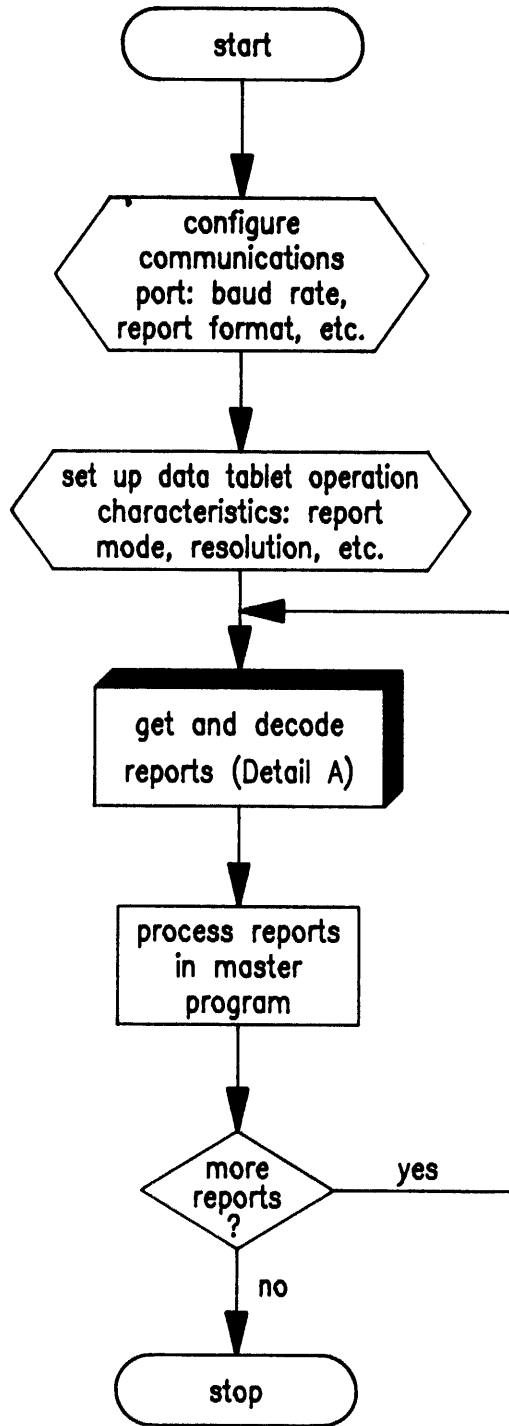


Figure 3-1 General Flowchart for Master Program to Read and Process Data Tablet Reports

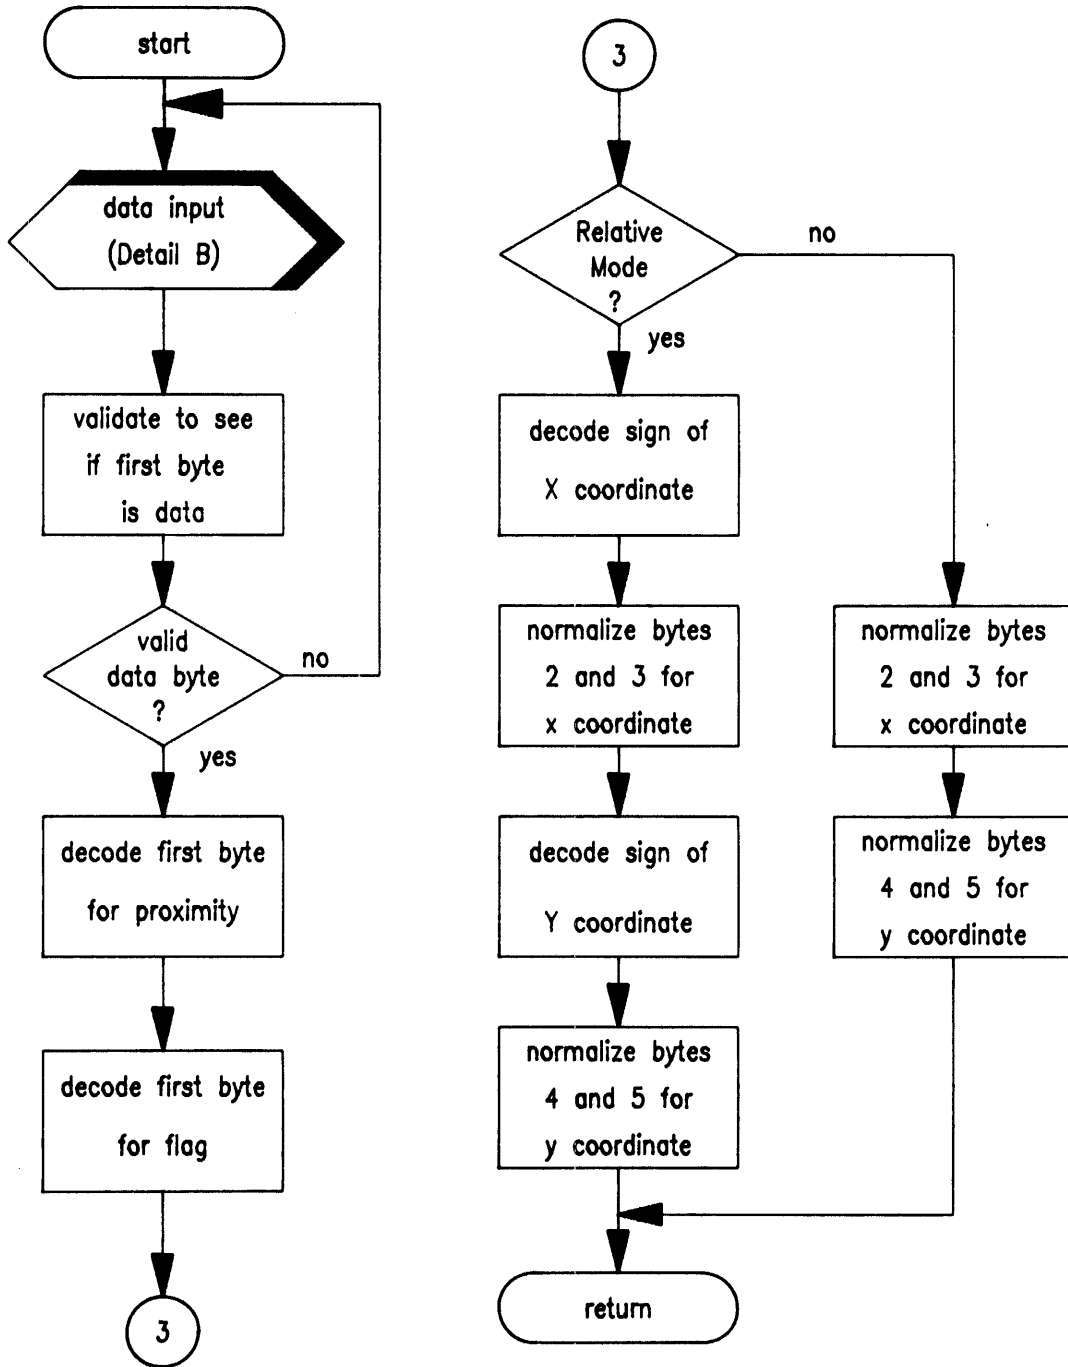


Figure 3-2 Detail A: Get and Decode Reports Subroutine

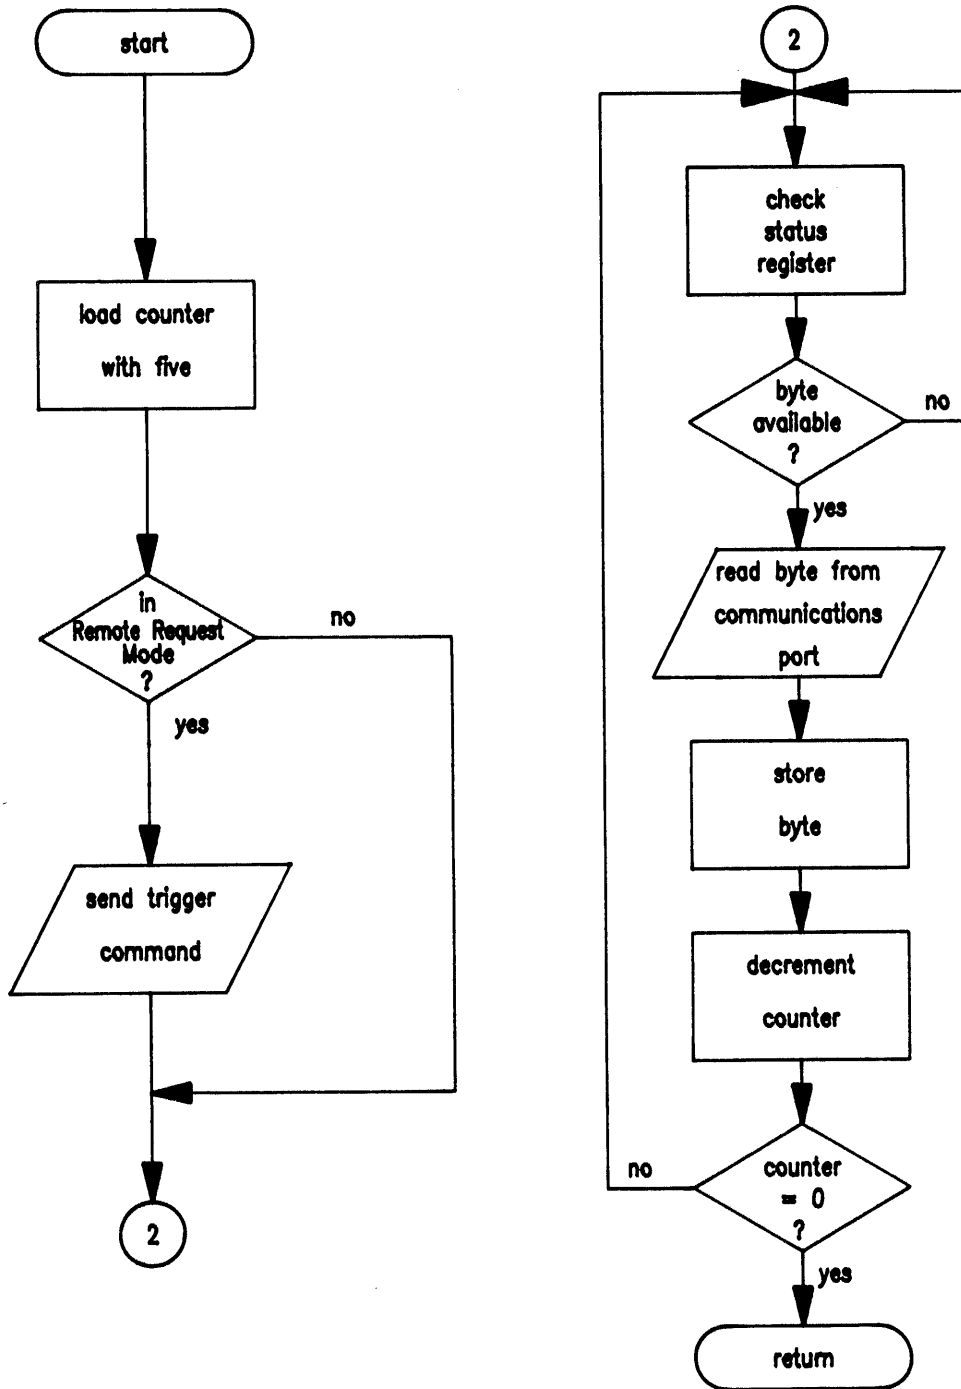


Figure 3-3 Detail B: Data Input Subroutine

Chapter 4 *Operating Characteristics and Commands*

The Bit Pad Two has a variety of operating characteristics and functions. The operating characteristics control the report flow, report content, tablet resolution, etc.

Set the Bit Pad Two's operating characteristics or initiate the functions with commands from the host or with the switches inside the tablet. The table below identifies the selector methods available:

Table 4-1 Methods of Operating Characteristic and Function Control

Operating Characteristics and Functions	Controlled by	
	Switch	Command
Stream Mode	yes	yes
Switch Stream Mode	yes	yes
Stream/Switched Stream Report Rate	yes	yes
resolution	yes	yes
Increment Mode and value	yes	yes
Remote Request Mode	yes	yes
Point Mode	yes	yes
Absolute/Relative Mode	yes	yes
Send Configuration	no	yes
Self Test	no	yes
Start/Stop Transmission	no	yes
Rest	yes	yes
NOP (no operation)	no	yes

Commands override switch settings. Note: The operating characteristics revert to the switch settings, however, each time you power up the data tablet or issue the Reset command.

In the following pages, each characteristic or function and its commands are defined. For easy reference, the commands appear in ASCII and hexadecimal. Appendix B, "ASCII Conversion Chart", also provides the binary, decimal, and octal conversions. A summary of the commands and switch settings appears in Appendix D, the Quick Reference Sheet, at the rear of this book.

The command byte format uses the same conventions as those used in the report formats: one start bit, seven data bits, an optional parity bit, and one or two stop bits.

Commands are one byte long. The Bit Pad Two command buffer can hold ten bytes; therefore, up to ten bytes can be sent to the Bit Pad Two in quick succession.

SECTION A CONTROLLING THE REPORT FLOW AND CONTENT

Use the operating characteristics described in this section to control:

- when reports are issued;
- how fast they are issued; and
- the coordinate content.

Furthermore, reports can be gated (allowed to flow or not) with the Start and Stop Transmission commands.

Some characteristics are called **modifiers** because they can be combined with **primary modes**. The primary modes are Stream, Switch Stream, Point, and Remote Request Modes. The modifiers are Absolute, Relative, and Increment Modes, as well as Report Rate. Section B, "Combining Characteristics", describes the results of the combinations.

PRIMARY MODES

STREAM MODE, SWITCH STREAM MODE, AND REPORT RATE

Command:

Mode and Rate	ASCII	Hex
Switch Stream at 2 rps	@	40
Switch Stream at 4 rps	A	41
Switch Stream at 10 rps	B	42
Switch Stream at 20 rps	C	43
Switch Stream at 40 rps	D	44
Switch Stream at 70 rps	E	45
Switch Stream at 100 rps	F	46
Switch Stream at maximum rps	G	47
Stream at 2 rps	H	48
Stream at 4 rps	I	49
Stream at 10	J	4A
Stream at 20	K	4B
Stream at 40	L	4C
Stream at 70	M	4D
Stream at 100	N	4E
Stream at maximum rps	O	4F

Switch Setting:

Stream Mode:

DIP #	Switch	Setting
1	3	on
	4	off

Switch Stream Mode:

DIP #	Switch	Setting
1	3	on
	4	on

Report Rate: DIP #1

Report Rate	Switch Settings		
	6	7	8
2 rps	off	off	off
4 rps	off	off	on
10 rps	off	on	off
20 rps	off	on	on
40 rps	on	off	off
70 rps	on	off	on
100 rps	on	on	off
maximum rps	on	on	on

Note that one command sets both the mode and Report Rate. However, five switches must be set to accomplish the same setting, two for the mode and three for the Report Rate.

STREAM MODE

In Stream Mode, the Bit Pad Two continuously issues reports. It is not necessary to press a cursor or stylus button.

Hint: To eliminate redundant reports from being issued when the cursor or stylus is stationary, use Stream Mode together with Increment Mode.

SWITCH STREAM MODE

In Switch Stream Mode, the Bit Pad Two continuously issues reports when a cursor or stylus button is pressed.

REPORT RATE

The Report Rate is the number of reports the data tablet issues each second. Use it with Stream or Switch Stream Mode.

Note that the Report Rate settings, such as 2 rps or 70 rps, are approximations. The rate at which the data tablet actually sends reports depends on the baud rate and the report format. The following tables identify the rates you can expect.

Table 4-2 Report Rates Relative to Baud Rates for Reports in Binary Format

Baud Rate	Actual Report Rate (approximate)							
	2 rps setting	4 rps setting	10 rps setting	20 rps setting	40 rps setting	70 rps setting	100 rps setting	maximum setting
1200	2	4	10	20	22	22	22	22
2400	2	4	10	21	37	40	40	40
4800	2	4	10	21	38	62	72	72
9600	2	4	10	21	38	69	95	119
19200	2	4	10	21	38	69	96	154

Table 4-3 Report Rates Relative to Baud Rates for Reports in ASCII BCD Format

Baud Rate	Actual Report Rate (approximate)							
	2 rps setting	4 rps setting	10 rps setting	20 rps setting	40 rps setting	70 rps setting	100 rps setting	maximum setting
1200	2	3	6	8	8	8	8	8
2400	2	4	8	13	16	16	16	16
4800	2	4	9	16	25	31	31	31
9600	2	4.5	9	18	30	46	53	57
19200	2	5	9.5	19	34	54	68	90

The Report Rates at 110, 150, and 300 baud are slower.

POINT MODE

Command:

	ASCII	Hex
----- command	P	50

Switch Setting:

DIP #	Switch	Setting
----- 1	3	off
	4	on

In Point Mode, the Bit Pad Two issues one report each time a cursor or stylus button is pressed. Reports can be issued up to the maximum Report Rate available for the set baud rate.

REMOTE REQUEST MODE

Command:

	ASCII	Hex
mode command	S	53
trigger command	T	54

Switch Setting:

DIP #	Switch	Setting
1	3	off
	4	off

In Remote Request Mode, the Bit Pad Two issues one report each time the host sends a trigger command. Issue the mode command once. Thereafter, send only a trigger command for each report.

After Remote Request Mode is initiated, the Bit Pad Two takes between two and ten milliseconds to issue the report resulting from the first trigger command. Subsequent reports can be issued up to the maximum Report Rate available for the set baud rate.

STOP MODE

Stop Mode was a mode used by the Bit Pad One. The Bit Pad Two has replaced it with the Remote Request Mode. Since these modes are not exactly alike, read the section on Remote Request Mode.

MODIFIERS

Absolute Mode

Command:

	ASCII	Hex
----- command	Q	51

Switch Setting:

DIP #	Switch	Setting
----- 1	5	off

In Absolute Mode, the Bit Pad Two issues reports as absolute coordinates. Absolute coordinates are measured relative to the tablet origin.

Reports issued from out-of-prox are repeats of the last valid coordinate pair.

Note: When reports are in binary format and the data tablet is in Absolute Mode, the maximum reportable value is 4095. (Reports in ASCII BCD format have no restrictions.) Reports larger than this are reported as the maximum value (4095). This, in effect, restricts the resolution setting to 254 lpi if you want the entire Bit Pad Two active area (11" x 11") available for digitizing. Higher resolutions can be used; however, the active area shrinks accordingly. The following table specifies the maximum length of each active area's axis from the tablet origin for resolutions higher than 254 lpi:

Resolution Setting	Maximum Axis Length (binary format only)
400	10.24 inches
500	8.19 inches
508	8.06 inches

Relative Mode

Command:

	ASCII	Hex
----- command	R	52

Switch Setting:

DIP #	Switch	Setting
----- 1	5	on

In Relative Mode, the Bit Pad Two issues reports as relative coordinates. Relative coordinates are measured "relative to" the last issued report, not the tablet origin.

In Relative Mode, reports can have positive or negative values.

Reports issued while the cursor or stylus is out-of-prox are zero.

Note: When the data tablet is in Relative Mode, the maximum negative coordinate that can be reported is restricted. In the binary format, the maximum reportable value is 2047. In the ASCII BCD format, the maximum reportable value is 999. Reports larger than these values are reported as the maximum value. (Positive coordinates are not restricted.)

The effect is a restriction of the maximum "delta" between reported points. The "delta" is the distance from the last report to the current report. The maximum delta varies, depending on the tablet's resolution setting. This relationship is quantified in the table below:

Resolution Setting	Max. Negative Delta ASCII BCD Format (in inches)	Max. Negative Delta Binary Format (in inches)
100	9.99	no restriction
127	7.87	no restriction
200	4.99	no restriction
254	3.93	8.06
400	2.5	5.12
500	1.99	4.09
508	1.97	4.03

Increment Mode

Command:

	ASCII	Hex

Increment equals:		
0 (disable)	a	61
1	b	62
2	c	63
3	d	64
4	e	65
5	f	66
10	g	67
20	h	68

Switch Setting:

	Increment Mode and Value: DIP #2		

	Switch Setting		
	3	4	5
0	off	off	off
1	off	off	on
2	off	on	off
3	off	on	on
4	on	off	off
5	on	off	on
10	on	on	off
20	on	on	on

In Increment Mode, the Bit Pad Two sends a report only when the cursor or stylus has traveled a minimum distance in the X or Y direction. This minimum distance is the increment. The increment is defined by you and applies to both axes. Because redundant reports are not sent to the host, Increment Mode is useful in reducing data output.

Here is a description of how Increment Mode works: The last report issued becomes the center of an imaginary square, whose sides are twice the increment value. The cursor can move anywhere inside the imaginary square without a report being issued. As soon as the increment is satisfied along either axis, the Bit Pad Two transmits the actual X and Y coordinates of the point. The new point becomes the center of a new, imaginary square.

Example: Figure 4-1 illustrates operation in this mode. Part A shows the imaginary square created around each report point; the increment is five. Part B shows the reports issued as the cursor or stylus travels across the tablet; the increment is 10.

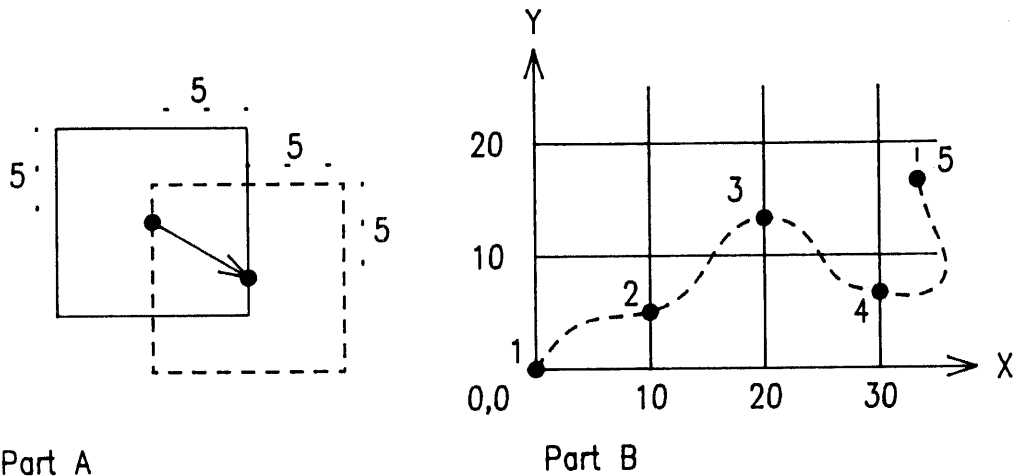


Figure 4-1 Increment Mode Example

The five points issued in part B are numbered in order.

Point	Report	Description
1	(0,0)	
2	(10,5)	Only X is satisfied. The actual value of Y is transmitted.
No point is transmitted between points 2 and 3 because the cursor or stylus did not move 10 resolution counts in either the X or the Y direction.		
3	(20,13)	The increment is satisfied from the last point along the X axis, only; the Bit Pad Two issues the new report.
4	(30,7)	The increment is satisfied from the last point along the X axis, only; the Bit Pad Two issues the new report.
5	(32,17)	The increment is satisfied from the last point along the Y axis, only; the Bit Pad Two issues the new report.

SECTION B COMBINING CHARACTERISTICS

This section describes some of the nuances of combining primary modes and modifiers.

- Reports are not issued in response to buttons being pressed when the data tablet is in Remote Request Mode.
- Reports are issued in response to either buttons being pressed or remote requests when the data tablet is in Point, Stream, or Switch Stream Mode.
- When the data tablet is in Stream, Switch Stream, or Point Mode together with Increment Mode and a button is pressed, the last coordinate pair that satisfies the increment is reported.
- When the data tablet is in Stream Mode and Increment Mode or Switch Stream Mode and Increment Mode, reports are issued as follows:
 - A report cannot be issued until the increment has been satisfied.
 - If the increment has been exceeded and the Report Rate mandates that a report be issued, the last coordinate pair that satisfies the increment is reported.
- When the data tablet is in Point and Increment Modes, reports are issued as follows:
 - If a button is pressed, but the the increment has not been met, the last coordinate pair that satisfies the increment is reported.
 - If the increment has been exceeded and a button is pressed, the actual stylus or cursor position is reported.
- When the data tablet is in Remote Request and Increment Modes, regardless of whether the increment has been satisfied or not, the actual position where the stylus or cursor is when the data tablet receives the remote trigger is reported position.

- If Point Mode or Remote Request Mode is set by switch, rather than by command, the Report Rate, also set by switch, is valid. Consequently, the Report Rate has priority over buttons or remote triggers.

SECTION C OTHER COMMANDS

RESOLUTION

Command:

	ASCII	Hex
Resolution of:		
100 lpi	i	69
127 lpi (5 lpmm)	j	6A
200 lpi	k	6B
254 lpi (10 lpmm)	l	6C
400 lpi	m	6D
500 lpi	n	6E
508 lpi (20 lpmm)	o	6F

Switch Setting:

	Resolution: DIP #2		
	Switch Setting		
	6	7	8
100 lpi	off	off	off
127 lpi (5 lpmm)	off	off	on
200 lpi	off	on	off
254 lpi (10 lpmm)	off	on	on
400 lpi	on	off	off
500 lpi	on	off	on
508 lpi (20 lpmm)	on	on	off

Resolution is the smallest distance or movement that the data tablet can distinguish. Resolution is a measure of precision and is expressed in lines per inch (lpi) or lines per millimeter (lpmm).

Note: The data format and the coordinate mode both play a role in which resolutions are valid for the entire tablet. Refer to the previous sections on Absolute and Relative Mode for further information.

SEND CONFIGURATION

Command:

	ASCII	Hex

command	s	73
	or ENQ	05

Switch Setting:

DIP #	Switch	Setting

		none

Use the Send Configuration command to send a report to the host that identifies the data tablet model and its version of software. The output looks like this:

```
MM1103 _BIT_PAD_II_ by_Summagraphics_Version_n.n<CR><LF>
```

where the underlines are spaces; n.n is the version number; and the line feed is switch-selective.

TRANSMISSION CONTROL

Command:

	ASCII	Hex

Stop Transmission	XOFF	13
Start Transmission	XON	11

Switch Setting:

DIP #	Switch	Setting

		none

The Start Transmission and Stop Transmission commands act as gates, allowing reports to be sent or not sent from the Bit Pad Two to the host. These commands control data flow, regardless of the report mode. (Stop Transmission and Start Transmission are equivalents of the transmission protocols XOFF and XON.)

Stop Transmission places the data tablet on standby. It is useful for systems that do not constantly use the data tablet. End the standby state by sending the Start Transmission command.

If a report is interrupted by Stop Transmission, no data is lost. The report is severed at the end of the byte. When the Start Transmission command is issued, the next byte in that report is sent, intact. To avoid corrupted data, the host

software should not look for a phasing bit at the beginning of resumed transmission.

The data tablet will respond to other commands, such as a command to change the resolution, while it is on standby. If the Reset command is issued while the data tablet is on standby, the data tablet honors the Reset command, but does not retract the XOFF state.

RESET

Command:

	ASCII	Hex
command	NUL	00

Switch Setting:

DIP #	Switch	Setting
A Reset switch is located inside the tablet on the printed circuit board. It is square and close to switch #3.		

Use the Reset command to return the operating characteristics to their current switch settings.

The factory-set defaults are:

report mode = Stream
coordinate system = absolute
Report Rate = 100 rps
increment = 0
resolution = 200 lpi

After a Reset is issued, there is a 10 millisecond delay before the Bit Pad Two is ready to receive information from the host.

NOP (NO OPERATION)

Command:

	ASCII	Hex	

command	SP	20	
	or	CR	0D

Switch Setting:

DIP #	Switch	Setting

		none

The data tablet performs no operation (NOP) when one of these commands is issued to it. This function can be used as a pad between command sequences, e.g. between XON and XOFF.

Chapter 5 *Checking the Data Tablet*

A quick, functional check of the data tablet can be performed by connecting the Bit Pad Two to a terminal and moving the cursor or stylus across the tablet's active area. (The output is easier to interpret if you have the report format set for ASCII BCD.) The X and Y values should increase as the cursor or stylus slides from the tablet origin toward the end of the axis. This is depicted in the following illustration:

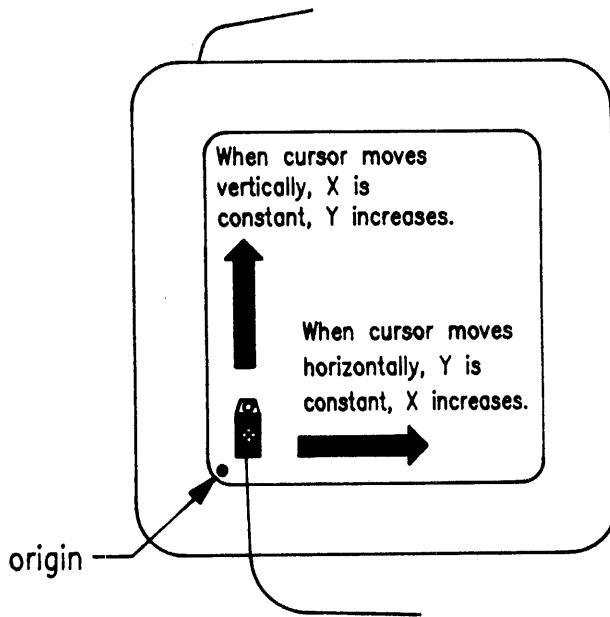


Figure 5-1 Quick Functional Check of the Data Tablet

Another mechanism for checking a Bit Pad Two is the Self Test diagnostic function, described below.

SECTION A SELF TEST DIAGNOSTIC FUNCTION

Command:

	ASCII	Hex
command	t	74

Switch Setting:

DIP #	Switch	Setting
		none

Use the Self Test command to perform tests on the tablet and cursor or stylus. Self Test checks:

- the analog circuitry;
- the cursor or stylus connection, operation, and location; and
- the digital circuitry.

After the test is performed, the results are sent to the host. The results are transmitted in one byte in the following format:

Table 5-1 Output Format of Self Test Function

Stop Bits	MSB	7	6	5	4	3	2	1	LSB	0	Start Bit
SB	P	T	0	0	PR	D	C	A	0		
A	analog circuitry test							pass = 1	fail = 0		
C	cursor/stylus connection and cursor/stylus coil operation test							pass = 1	fail = 0		
D	digital circuitry test							pass = 1	fail = 0		
PR	cursor/stylus on/off tablet							on = 1	off = 0		
T	total test result (This result is based only on the results of tests A, C, and D.)							pass = 1	fail = 0		
P	parity							n/a			
SB	stop bit or bits							n/a			

If the Self Test output byte is an ASCII O or G, the data tablet passed the diagnostic tests. (An O simply indicates that the stylus/cursor is in proximity. A G indicates that it is out-of-prox.) Any other character denotes a problem, and you should call your Summagraphics representative or Summagraphics' Customer Service department.

SECTION B IN CASE OF FAILURE

If the Bit Pad Two fails to operate or fails the Self Test, follow these steps:

1. Power down the Bit Pad Two.
2. Check that cables are firmly attached.
3. Ensure that the host is working properly.
4. If possible, issue each diagnostic command and review the results.

If the Bit Pad Two is still malfunctioning, contact Summagraphics' Customer Service department. The address and phone number appear in Chapter 6.

Chapter 6 *Operating Environment, Installation, Care, and Service*

This chapter provides information on:

- the recommended operating environment for the Bit Pad Two;
- unpacking and installing the Bit Pad Two;
- caring for and cleaning the Bit Pad Two; and
- whom to contact for service.

SECTION A OPERATING ENVIRONMENT

TEMPERATURE AND HUMIDITY

Operate the Bit Pad Two within these temperature and humidity ranges:

+45 degrees to +110 degrees Fahrenheit
+7 degrees to +43 degrees Celsius
8% to 80% relative humidity, non-condensing

Acceptable non-operating conditions are:

-45 degrees to +145 degrees Fahrenheit
-43 degrees to +63 degrees Celsius
8% to 80% relative humidity, non-condensing

Extremes in environment can cause degradation of operation.

POWER

The power supply shipped with the Bit Pad Two provides the proper power:
300 mA at +12VDC with +/- .5% regulation or better and 100 mA at -12VDC with
+/- .5% regulation or better.

SECTION B UNPACKING AND INSTALLATION

UNPACKING

Immediately upon receipt, inspect the package for damage. If damage exists:

1. Open the package and inspect the damage.
2. Report the damage to the carrier as soon as possible, preferably within 72 hours or receipt.
3. Record the damaged items on the freight bill.
4. Write to the carrier: state that the shipment was damaged, when it was received, and request an inspection.
5. Keep the shipment in its original container until an inspection is made by the carrier.
6. Notify Summagraphics Corporation's Traffic Department immediately. (Use the same address and telephone number given later in this chapter for Customer Service.)

Otherwise, unpack the Bit Pad Two. The package should include:

- one tablet with data/power cable attached
- one set (four) rubber feet
- one "Bit Pad Two Data Tablet Technical Reference"
- one power supply

Purchasable options include a:

- cursor
- stylus
- gender changer or reversing cable
- power cable (for international power supply)

INSTALLATION

A brief summary of the steps for assembling and installing a Bit Pad Two is as follows:

1. Configure the Bit Pad Two data tablet.
2. Adjust the tilt or use flat.
3. Attach stylus holder, if applicable.
4. Connect the stylus or cursor to the tablet.
5. Connect the tablet to the host.
6. Connect the tablet to the power source.

Detailed illustrations and instructions follow.

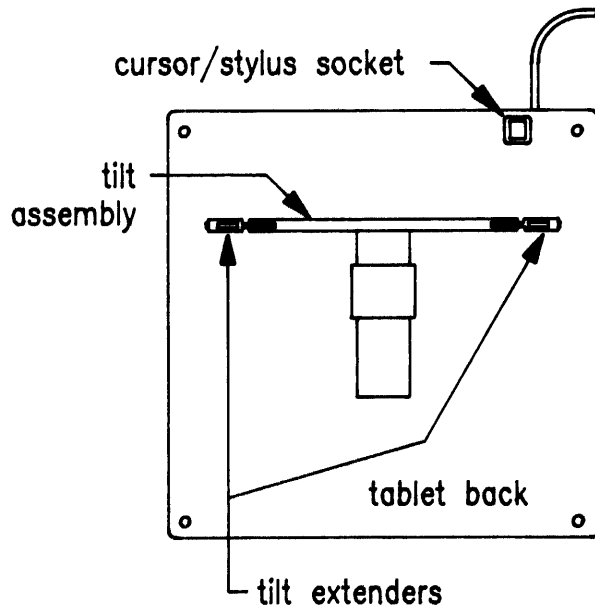
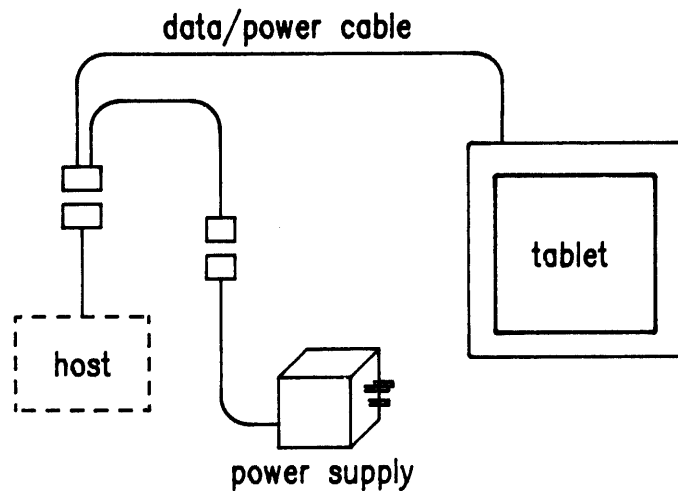


Figure 6-1 Bit Pad Two Components and Accessories

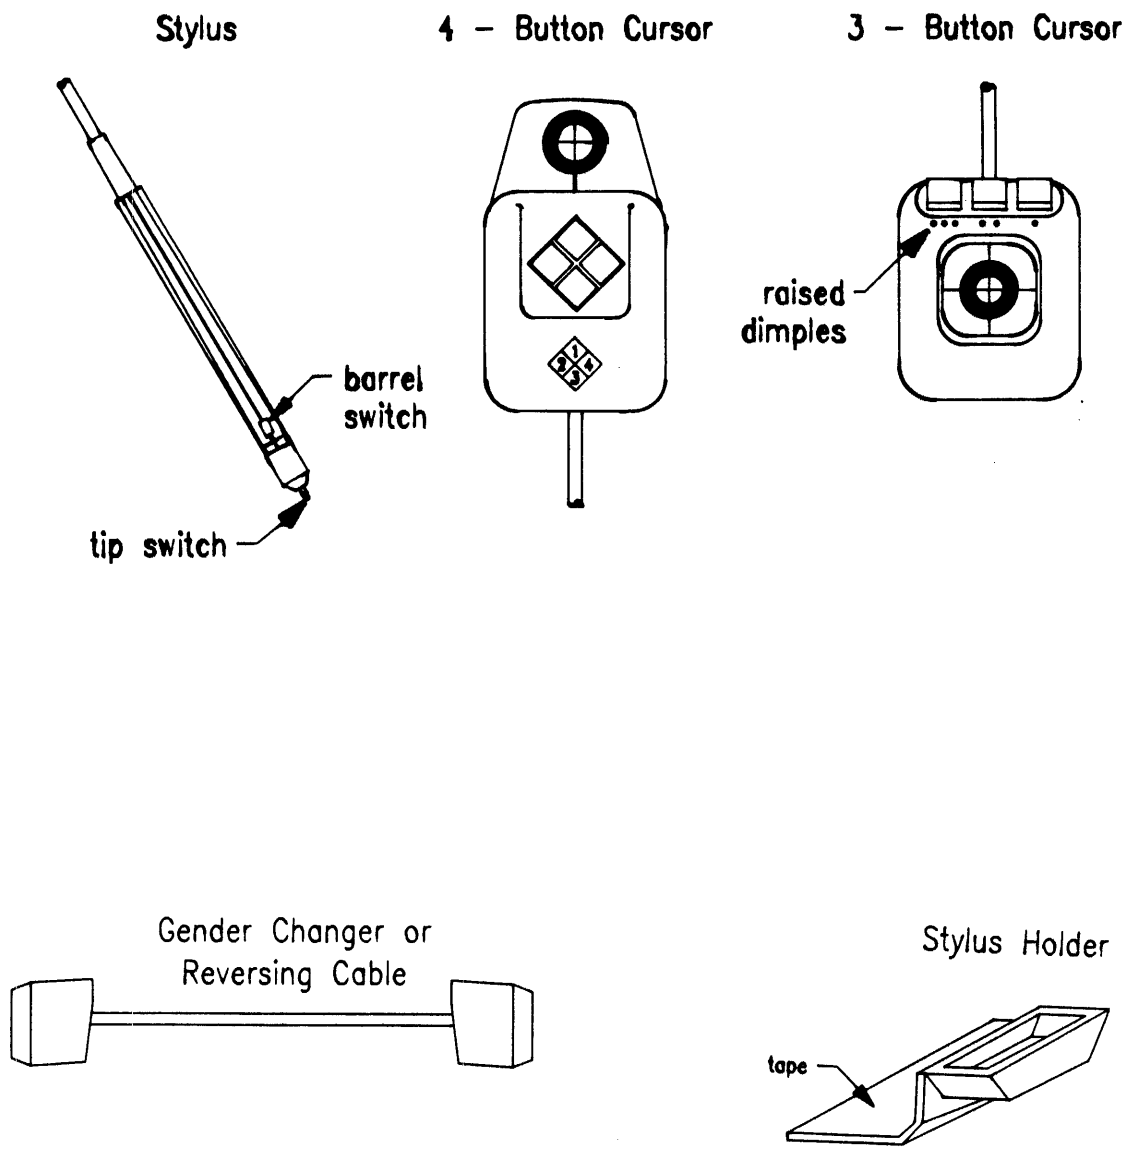


Figure 6-2 Bit Pad Two Components and Accessories

1. Configure the Bit Pad Two Data Tablet

The Bit Pad Two's configuration parameters are set at the factory to your specifications. (Chapter 2 explains each of these parameters.) If, however, you want to change the configuration, you can do so by setting the switches inside the tablet. It is advantageous to do this step before connecting the unit with the host since it requires disassembling the tablet.

CAUTION

Every time you open the tablet cabinetry, observe the following instructions:

Disconnect the tablet from its power source before opening the case. Special care must be taken when the tablet case is open. Components on the printed circuit board, especially the microprocessor, can be damaged or destroyed by electrostatic discharges. This can be avoided by preventing static electricity from building up. Here are some guidelines:

- *Have an antistatic floor covering under you and the tablet.*
- *Use a conductive, grounded work surface.*
- *Keep yourself at ground potential with conductive wrist bands and a 1 megohm resistor to ground.*
- *Do not wear clothes or shoes made of materials that promote static electricity, e.g. nylon, polyester, or wool.*

To access the board, lay the tablet upside down on a table. Remove the phillips-head screws along the outer edge. Gently remove the tablet back.

The switches are slide or rocker switches, grouped in banks of eight switches per DIP switch. The DIP switches are labelled SW1, SW2, and SW3 and are located along the periphery of the printed circuit board, as shown in the illustration below:

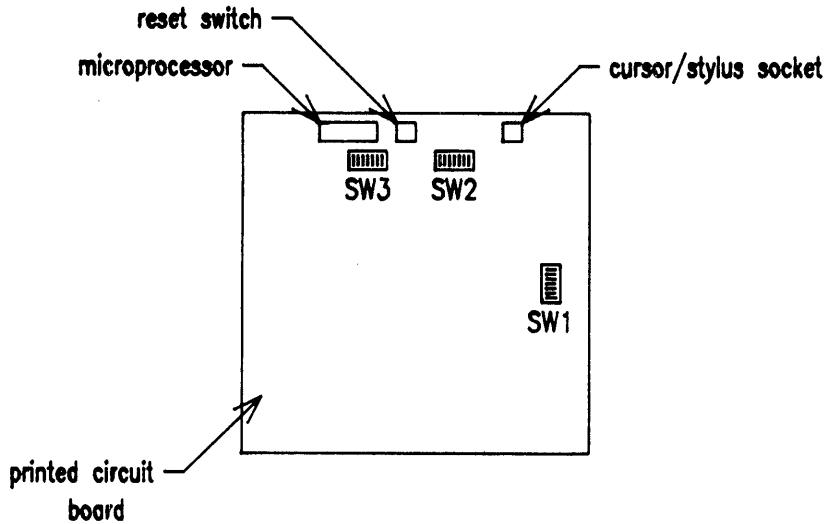


Figure 6-3 DIP Switch Locations on the Printed Circuit Board

The ON and OFF positions are labelled on each switch. Set a slide switch by sliding it to the desired position. Set a rocker switch by pressing down on the side next to the desired position. Use a pointed instrument. *Do not*, however, use a pencil or another instrument that could deposit residue, e.g. graphite or ink, on the switch. This could cause the switch to malfunction.

2. Adjust the Tilt or Use Flat

The Bit Pad Two tablet can tilt or lie flat. The tilt mounting is already attached to the back of the tablet when shipped. It tilts four to six degrees or ten to fourteen degrees, depending on the position the extenders.

For the tablet to lie flat, the tilt mounting must be removed and the four rubber feet attached to the tablet bottom:

- Slide the tilt mounting toward the edge of the tablet where the data/power cable protrudes.
- Lift the tilt mounting gently to clear the cursor/stylus socket. Remove the tilt assembly.
- Remove the paper backing from the rubber feet. Stick the feet on the tablet back, approximately one inch from each corner.

3. Attach Stylus Holder (if applicable)

Attach the stylus holder anywhere along the tablet edge within five inches from the tablet top. Refer to the illustration below:

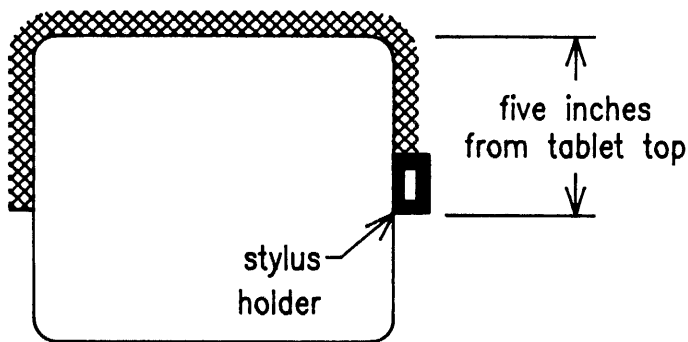


Figure 6-4 Stylus Holder Location

Remove the protective paper from the adhesive tape. Attach the taped side to the back of the tablet.

4. Connect the Stylus or Cursor to the Tablet

The stylus or cursor plugs into a "phone" jack on the under side of the tablet.

Cursors and stylus are interchangeable. Upon changing from a stylus to a cursor or from a cursor to a stylus, reset the tablet by powering it down or by issuing the Reset command.

Note: When the tablet is powered and the stylus is plugged in but not in use, store the stylus in the stylus holder. This allows air to freely circulate around the tip. Not providing air circulation could damage the stylus from overheating.

5. Connect the Tablet to the Host

The RS-232-C cable is equipped with a 25-pin female D connector with a jack screw. The host must have a 25-pin male D connector (AMP P/N 205208-1). To lock the connectors together, the host connector must have a screwlock (AMP P/N 205817-1).

If your system requires them, adapter cables are available to change the connector gender from female to male; or to reverse communication lines. Install an adapter cable between the Bit Pad Two data/power cable and the host.

6. Connect the Tablet to the Power Source

Plug the four-pin connector of the pigtail cable into the power supply. In turn, plug the power supply into the wall outlet. For international power supplies, a plug adapter cable must be connected between the power supply and the wall outlet.

CHANGING THE STYLUS REFILL

As depicted in the illustration below, to change the stylus refill, pull the cap straight out; likewise, the refill. Replace the refill and the cap.

Note: Do not remove the metal guide-ring in the cap. It keeps the refill in place.

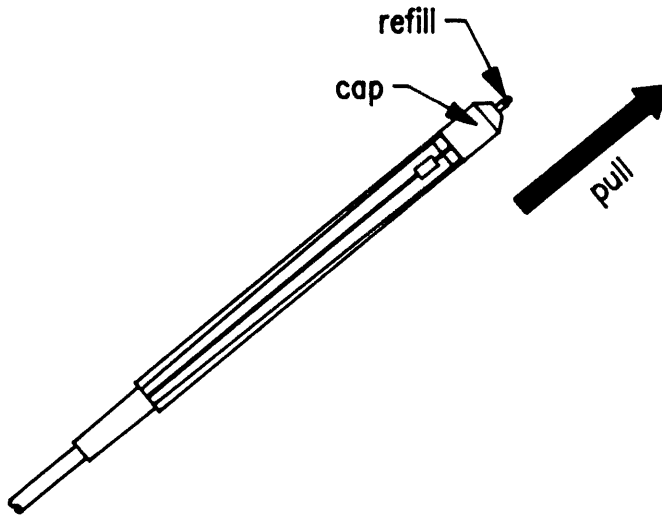


Figure 6-5 Changing the Stylus Refill

SECTION C FCC CONSIDERATIONS

As stated in the FCC statement at the front of this book, the Bit Pad Two must be installed and operated in accordance with the procedures appearing in this manual.

In addition, to ensure that EMI shielding requirements are met, the host's interface cabling connector must have a metal shroud, grounded to the host chassis.

SECTION D CARE AND CLEANING

Avoid sharply banging or dropping the tablet, cursor, or stylus.

Never immerse any part in fluid.

Disconnect the tablet from its power source before cleaning it.

The Bit Pad Two tablet surface is made of plastic. To clean, use only a cotton flannel cloth with mild detergent and water. Never use a hydrocarbon cleaner such as acetone, or an abrasive cloth. These mar the tablet finish.

SECTION E SERVICE

For technical support and service, contact your local Summagraphics representative or Summagraphics Corporation at:

Customer Service Department
Summagraphics Corporation
777 State Street Extension
Fairfield, Connecticut 06430

(203) 384-1344

If you return a Bit Pad Two for repair, a Return Authorization Number must be on the outside of the package and on all accompanying paperwork. Obtain a Return Authorization Number from Summagraphics' Customer Service department. When contacting Customer Service, please have ready the tablet serial number and the purchase order number.

Do not ship any equipment to Summagraphics without a Return Authorization Number.

Appendix A Specifications

PHYSICAL DESCRIPTION

Overall Dimensions	Active Area (nominal)	Weight
16.0" x 16.2" x 0.80"	11" x 11"	max. 7 lbs.
406mm x 412mm x 20mm	280 mm x 280 mm	3.2kg

POWER REQUIREMENTS

300 mA at +12VDC with +/-5% regulation or better and 100 mA at -12VDC with +/-5% regulation or better

OPTIONAL POWER SUPPLIES

U.S.A.: 102V to 132V, 58Hz to 62Hz, NEMA 5-15P plug

International: 197V to 264V, 48Hz to 52Hz, I.E.C. Universal power receptacle (power cable with European plugs sold separately)

Japan: 90V to 110V, 42Hz to 62Hz, NEMA 1-15P plug

MATERIAL AND COSMETICS

Color: pearl white

Finish: matte (silk-like)

Material: Cycolac KJW flame-retardant ABS plastic

OPERATING SPECIFICATIONS

An Bit Pad Two performs to the specifications listed below. The word "typical" is used to describe accuracy and proximity. Typical means the unit performs to that specification over more than 90 percent of the active area at 25 degrees Celsius. A slight degradation occurs at the extreme edges and corners of the active area.

The following specifications are provided to aid in the understanding and use of the product. For detailed specifications, refer to the Summagraphics engineering document "Standard OEM Version Bit Pad Two Specification".

Proximity ... 0.5" (12.7mm) typical

Proximity is the maximum distance the cursor or stylus can be held above the active area and report the position of the stylus or cursor.

Accuracy ... +/- 0.025" (.625mm) typical

Accuracy is how closely a point's actual location is determined.

Jitter ... cursor: +/-1 least significant bit; stylus: +/-2 least significant bits

Jitter is the difference in values collected by the data tablet for the same point (for example, 10.999, 11.000, 11.001). Jitter is caused by electrical noise in the tablet's analog circuitry. Noise affects the signal that identifies a point. Jitter is measured as one unit of the set resolution.

Repeatability ... +/- 0.010" (.250mm) or better

Repeatability is how closely you receive the same coordinates from the repeatedly locating the point. Repeatability takes temperature range and jitter into consideration.

Cursor Eccentricity ... +/-0.005" (.125) or better

Cursor eccentricity is how much the electrical center varies from the cross hair center as the cursor is rotated through 360 degrees.

Appendix B ASCII Conversion Chart

Decimal	Binary 7 6 5 4 3 2 1 0	Octal	Hex	ASCII Character	Control Function or Character Description
0	00000000	000	00	NUL	Null
1	00000001	001	01	SOH	Start of Heading
2	00000010	002	02	STX	Start of Text
3	00000011	003	03	ETX	End of Text
4	00000100	004	04	EOT	End of Transmission
5	00000101	005	05	ENQ	Enquiry
6	00000110	006	06	ACK	Acknowledge
7	00000111	007	07	BEL	Bell
8	00001000	010	08	BS	Backspace
9	00001001	011	09	HT	Horizontal Tab
10	00001010	012	0A	LF or NL	Line Feed or New Line
11	00001011	013	0B	VT	Vertical Tab
12	00001100	014	0C	FF	Form Feed
13	00001101	015	0D	CR or RT	Carriage Return
14	00001110	016	0E	SO	Shift Out
15	00001111	017	0F	SI	Shift In
16	00010000	020	10	DLE	Data Link Escape
17	00010001	021	11	DC1	Device Control 1
18	00010010	022	12	DC2	Device Control 2
19	00010011	023	13	DC3	Device Control 3
20	00010100	024	14	DC4	Device Control 4
21	00010101	025	15	NAK	Negative Acknowledge
22	00010110	026	16	SYN	Synchronous Idle
23	00010111	027	17	ETB	End Transmission Block
24	00011000	030	18	CAN	Cancel
25	00011001	031	19	EM	End of Medium
26	00011010	032	1A	SUB	Substitute
27	00011011	033	1B	ESC	Escape
28	00011100	034	1C	FS	File Separator
29	00011101	035	1D	GS	Group Separator
30	00011110	036	1E	RS	Record Separator
31	00011111	037	1F	US	Unit Separator
32	00100000	040	20	SP	Space
33	00100001	041	21	!	Exclamation Point
34	00100010	042	22	"	Double Quote
35	00100011	043	23	#	Number or Pound
36	00100100	044	24	\$	Dollar
37	00100101	045	25	%	Percent
38	00100110	046	26	&	Ampersand
39	00100111	047	27	'	Apostrophe, Right Single Quote
40	00101000	050	28	(Left Parenthesis
41	00101001	051	29)	Right Parenthesis
42	00101010	052	2A	*	Asterisk
43	00101011	053	2B	+	Plus or Addition
44	00101100	054	2C	,	Comma
45	00101101	055	2D	-	Hyphen

cont.

Decimal	Binary 7 6 5 4 3 2 1 0	Octal	Hex	ASCII Character	Control Function or Character Description
46	001011110	056	2E	.	Period
47	001011111	057	2F	/	Slash
48	001100000	060	30	0	
49	001100001	061	31	1	
50	001100010	062	32	2	
51	001100011	063	33	3	
52	001100100	064	34	4	
53	001100101	065	35	5	
54	001100110	066	36	6	
55	001100111	067	37	7	
56	001110000	070	38	8	
57	001110001	071	39	9	
58	001110010	072	3A	:	Colon
59	001110011	073	3B	;	Semicolon
60	001110100	074	3C	<	Less Than
61	001110101	075	3D	=	Equals
62	001110110	076	3E	>	Greater Than
63	001110111	077	3F	?	Question Mark
64	010000000	100	40	@	Commercial At
65	010000001	101	41	A	
66	010000010	102	42	B	
67	010000011	103	43	C	
68	010000100	104	44	D	
69	010000101	105	45	E	
70	010000110	106	46	F	
71	010000111	107	47	G	
72	010001000	110	48	H	
73	010001001	111	49	I	
74	010001010	112	4A	J	
75	010001011	113	4B	K	
76	010001100	114	4C	L	
77	010001101	115	4D	M	
78	010001110	116	4E	N	
79	010001111	117	4F	O	
80	010100000	120	50	P	
81	010100001	121	51	Q	
82	010100010	122	52	R	
83	010100011	123	53	S	
84	010100100	124	54	T	
85	010100101	125	55	U	
86	010100110	126	56	V	
87	010100111	127	57	W	
88	010110000	130	58	X	
89	010110001	131	59	Y	
90	010110010	132	5A	Z	
91	010110011	133	5B	[Left Square Bracket
92	010110100	134	5C	\	Back Slash
93	010110101	135	5D]	Right Square Bracket

cont.

Decimal	Binary 7 6 5 4 3 2 1 0	Octal	Hex	ASCII Character	Control Function or Character Description
94	0 1 0 1 1 1 1 0	136	5E	^	Circumflex
95	0 1 0 1 1 1 1 1	137	5F	~	Underscore
96	0 1 1 0 0 0 0 0	140	60	‘	Left Single Quote
97	0 1 1 0 0 0 0 1	141	61	a	
98	0 1 1 0 0 0 1 0	142	62	b	
99	0 1 1 0 0 0 1 1	143	63	c	
100	0 1 1 0 0 1 0 0	144	64	d	
101	0 1 1 0 0 1 0 1	145	65	e	
102	0 1 1 0 0 1 1 0	146	66	f	
103	0 1 1 0 0 1 1 1	147	67	g	
104	0 1 1 0 1 0 0 0	150	68	h	
105	0 1 1 0 1 0 0 1	151	69	i	
106	0 1 1 0 1 0 1 0	152	6A	j	
107	0 1 1 0 1 0 1 1	153	6B	k	
108	0 1 1 0 1 1 0 0	154	6C	l	
109	0 1 1 0 1 1 0 1	155	6D	m	
110	0 1 1 0 1 1 1 0	156	6E	n	
111	0 1 1 0 1 1 1 1	157	6F	o	
112	0 1 1 1 0 0 0 0	160	70	p	
113	0 1 1 1 0 0 0 1	161	71	q	
114	0 1 1 1 0 0 1 0	162	72	r	
115	0 1 1 1 0 0 1 1	163	73	s	
116	0 1 1 1 0 1 0 0	164	74	t	
117	0 1 1 1 0 1 0 1	165	75	u	
118	0 1 1 1 0 1 1 0	166	76	v	
119	0 1 1 1 0 1 1 1	167	77	w	
120	0 1 1 1 1 0 0 0	170	78	x	
121	0 1 1 1 1 0 0 1	171	79	y	
122	0 1 1 1 1 0 1 0	172	7A	z	
123	0 1 1 1 1 0 1 1	173	7B	{	Left Curved Bracket
124	0 1 1 1 1 1 0 0	174	7C		Vertical Line
125	0 1 1 1 1 1 0 1	175	7D	}	Right Curved Bracket
126	0 1 1 1 1 1 1 0	176	7E	~	Tilde
127	0 1 1 1 1 1 1 1	177	7F	DEL	Delete (rubout)

Appendix C How the Bit Pad Two is Different from the Bit Pad One

The Bit Pad Two is a second generation data tablet. It is, with some minor exceptions, a plug replacement for the Bit Pad One.

As an improved version of its predecessor, dissimilarities do exist. For example, the Bit Pad Two uses more advanced hardware and a different technology.

Some noteworthy exceptions are that the Bit Pad Two:

- does not require biasing: pulling a magnet over the tablet.
- report formats, binary and ASCII BCD, include a bit or character identifying whether the stylus/cursor is in or out of proximity.
- offers more operating characteristics to choose from, such as Relative Mode.
- maximum baud rate is 19.2 K.
- hardware interface is RS-232-C.
- does not have a Stop Mode, as such. Instead, it offers two alternatives, XOFF and Remote Mode. Note that the command previously used by the Bit Pad One to initiate Stop Mode is now the command for Remote Request Mode.

Appendix D Quick Reference Sheet of Commands and Switch Settings

COMMAND	ASCII	HEX	COMMAND	ASCII	HEX
Switch Stream 2 rps	@	40	Increment:		
Switch Stream 4 rps	A	41	0 (disable)	a	61
Switch Stream 10 rps	B	42	1	b	62
Switch Stream 20 rps	C	43	2	c	63
Switch Stream 40 rps	D	44	3	d	64
Switch Stream 70 rps	E	45	4	e	65
Switch Stream 100 rps	F	46	5	f	66
Switch Stream maximum	G	47	10	g	67
Stream 2 rps	H	48	20	h	68
Stream 4 rps	I	49	Resolution:		
Stream 10 rps	J	4A	100 lpi	i	69
Stream 20 rps	K	4B	127 lpi (5 lpmm)	j	6A
Stream 40 rps	L	4C	200 lpi	k	6B
Stream 70 rps	M	4D	254 lpi (10 lpmm)	l	6C
Stream 100 rps	N	4E	400 lpi	m	6D
Stream maximum	O	4F	500 lpi	n	6E
Point Mode	P	50	508 lpi (20 lpmm)	o	6F
Remote Request			Send Configuration	s	73
mode	S	53	Send Configuration	ENQ	05
trigger	T	54	Self Test	t	74
Relative Mode	R	52	Stop Transmission	XOFF	13
Absolute Mode	Q	51	Start Transmission	XON	11
NOP (no operation)	CR	0D	Reset	NUL	00
NOP (no operation)	SP	20			

SWITCH SETTINGS

DIP Switch 1

Operating Characteristics and Configuration Parameters	Factory Setting	Switches and Settings							
		1	2	3	4	5	6	7	8
remote control	
enable		on
disable	√	off
proximity transmission	
always transmit		.	on
only when in proximity ..	√	off
stream	
enable	√	on
disable		.	.	off
switch	
enable		.	.	.	on
disable	√	off
coordinate content	
Absolute Mode	√	off	.	.	.
Relative Mode		on	.	.	.
Report Rate of	
2 rps		off	off	off
4 rps		off	off	on
10 rps		off	on	off
20 rps		off	on	on
40 rps		on	off	off
70 rps		on	off	on
100 rps	√	on	on	off
maximum		on	on	on

DIP Switch 2

Operating Characteristics and Configuration Parameters	Factory Setting	Switches and Settings							
		1	2	3	4	5	6	7	8
report format									
ASCII BCD	√	on
binary		off
ASCII report terminator									
CR LF	√	on
CR		off
increment setting									
0	√			off	off	off	.	.	.
1				off	off	on	.	.	.
2				off	on	off	.	.	.
3				off	on	on	.	.	.
4				on	off	off	.	.	.
5				on	off	on	.	.	.
10				on	on	off	.	.	.
20				on	on	on	.	.	.
resolution setting									
100 lpi							off	off	off
127 lpi or 5 lpmm							off	off	on
200 lpi	√						off	on	off
254 lpi or 10 lpmm							off	on	on
400 lpi							on	off	off
500 lpi							on	off	on
508 lpi or 20 lpmm							on	on	off

DIP Switch 3

Operating Characteristics and Configuration Parameters	Factory Setting	Switches and Settings							
		1	2	3	4	5	6	7	8
parity	
enable	√	on
disable		off
enabled parity setting	
odd			on
even	√		off
number of stop bits	
two	√			on
one				off
CTS handshake	
enable	√				on
disable					off
cursor output code	
output A	√					on	.	.	.
output B						off	.	.	.
baud rate	
110							off	off	off
150							off	off	on
300							off	on	off
1200							off	on	on
2400							on	off	off
4800							on	off	on
9600	√						on	on	off
19200							on	on	on