



RECESSED ANSI SWITCH

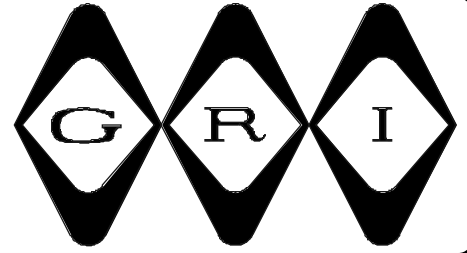

◆ U.L. Listed 

◆ Optimum Concealment Application

◆ One Inch Gap On S.P.D.T.


◆ 36" Jacketed Cable Lead, Custom Lengths Available

◆ Easy Install Replaces standard ANSI Stainless Steel Door Plate

◆ Covert Installation Enhances Resistance To Tampering Or Compromise



229

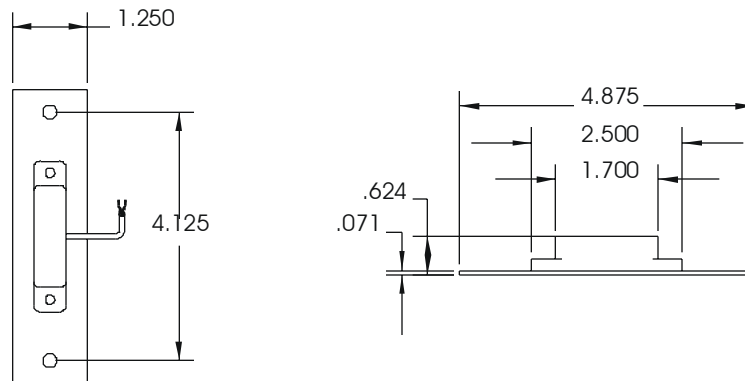

Minimum General Specifications:

PART NUMBER	LOOP TYPE	ELECTRICAL CONFIG.	REED FORM	MAXIMUM INITIAL CONTACT RESISTANCE (Ω)	MAXIMUM CONTACT RATING (W)	MAXIMUM SWITCHING VOLTAGE (VDC/VAC)	MAXIMUM SWITCHING CURRENT (A)
229	Open/Closed	SPDT	C	.140	5	175 VDC	.250

GEORGE RISK INDUSTRIES, INC.
GR.I. PLAZA
KIMBALL, NE 69145

