


Safety Technology International, Inc.

2306 Airport Road • Waterford, Michigan 48327-1209 Phone: 248-673-9898 • Fax: 248-673-1246 Toll Free: 800-888-4784 • E-mail: info@sti-usa.com

Web: www.sti-usa.com


Safety Technology International (Europe) Ltd.


Unit 49G Pipers Road • Park Farm Industrial Estate • Redditch Worcestershire • B98 OHU • England • Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999 • Freephone: 0800 085 1678 (UK only) E-mail: info@sti-europe.com • Web: www.sti-europe.com

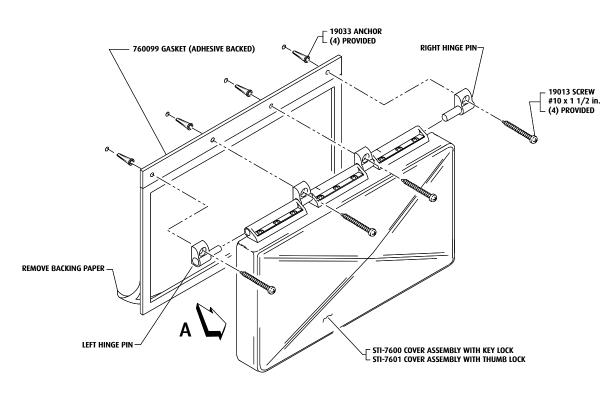



- 1. Center cover over device to be protected.
- 2. Place a mark near the location of the cam latch.
- 3. Install cam latch and latch spacer if gasket is used.
- 4. Turn key or thumb lock to locked position (cam is facing downward, see view A).
- 5. Place cover over device making sure cam is fully engaged under cam latch (see view A).
- 6. Force cover against wall and mark mounting holes.
- 7. Remove cover and drill 3/16 in.(4.7mm) diameter holes.
- 8. Install gasket and cover assembly with screws provided. The use of provided anchors is optional.



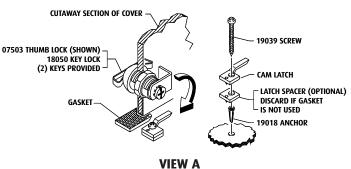

CLEANING INSTRUCTIONS

- 1. Rinse cover with water to remove abrasive dust and dirt.
- 2. Wash with soap or mild detergent using a soft cloth. (DO NOT SCRUB.)
- 3. Rinse once more, then dry with a soft cloth or chamois.
- 4. To remove grease or wet paint, rub gently with a cloth wetted thoroughly with naphtha, then wash and rinse. (DO NOT USE RAZOR BLADES.)

INSTALLATION OF STI-7600 MEGA STOPPER®

All specifications and information shown were current as of publication, and are subject to change without notice.