INSTALLATION INSTRUCTIONS

1. Center wire guard over strobe.
2. Place clamps in recommended position as shown.
3. Mark hole locations on wall and drill hole diameter according to NOTE above.
4. Insert anchors and/or screws and tighten.

NOTE: DRILL (4) 5/32 DIA. HOLES 1-1/2 in. DEEP. IF USING 19033 ANCHOR, DRILL (4) 11/32 DIA. HOLES 1-1/2 in. DEEP.

19033 ANCHOR (4) PROVIDED

19013 #10 x 1-1/2 in. SCREW (4) PROVIDED

19020 CLAMP (4) PROVIDED

STI-9705 AND STI-9705-R WIRE GUARD FLUSH MOUNT

STI-9708 AND STI-9708-R WIRE GUARD SURFACE MOUNT
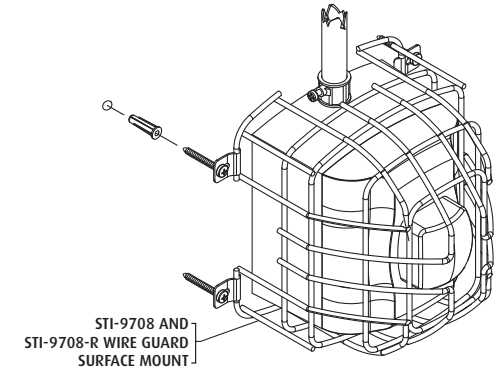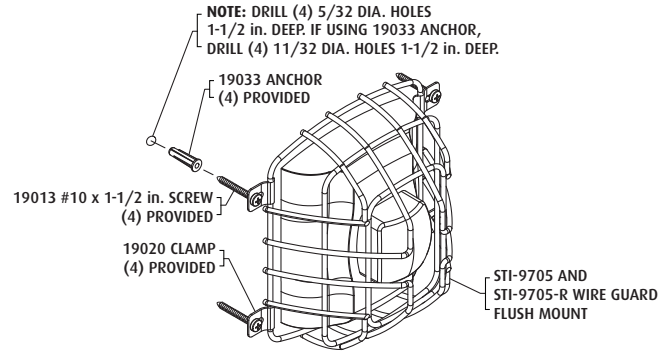
Light De-Rating Factor
STI-9705 and STI-9708

|	Light Loss %
System Sensor(SR,SW,SW-ALERT,SW-CLR-ALERT,SRK,SWK,P2R,P2W,P4R,P4W,CHSR,CHSW, P2RK,P2WK,P4RK,P4WK,SPSR,SPSR-SP,SPSR-PG,SPSW,SPSW-CLR-ALERT,SPSW-SP,SPSW-PG-,SPSRV,SPSRV-SP,SPSRV-PG,SPSWV,SPSWV-SP and SPSWV-PG,SPSWK,SPSRK,SPSW-ALERT)	13.0%
System Sensor (SRH,SWH,SRHK,SWH-ALERT,SWHK,P2RH,P2WH,P4RH,P2RHK,P2WHK,P2RHK-120, SPSRH,SPSRH-SP,SPSRH-PG,SPSWH,SPSWH-SP and SPSWH-PG,SPSRHK)	0%

6.15 in. (156mm)

3.39 in. (86mm)

7.40 in. (188mm)

6.74 in. (171mm)

6.09 in. (155mm)

7.49 in. (190mm)
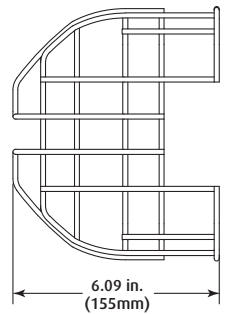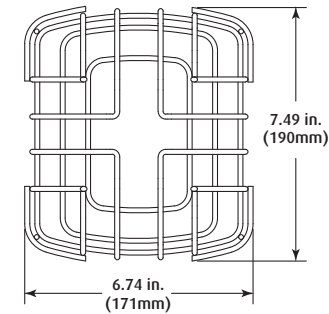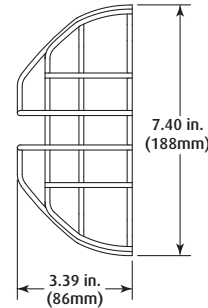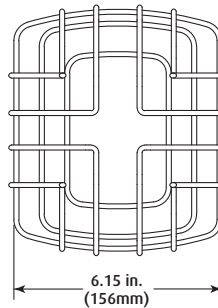
INSTALLATION OF STI-9705 AND STI-9708 HORN/STROBE/SPEAKER DAMAGE STOPPER®

All specifications and information shown were current as of publication and are subject to change without notice.

9705 AND 9708 JULY2010

ADDITIONAL WIRE GUARDS AVAILABLE

Visit **www.sti-usa.com** for complete details

SMOKE DETECTOR COVERS

|	
STI-9601	Low profile - Flush mount
STI-9601-SS	Low profile - Flush mount - Stainless Steel
STI-9602	Low profile - Surface mount
STI-9604	Mini - Flush mount
STI-9604-SS	Mini - Flush mount -Stainless Steel
STI-9605	Mini - Surface mount
STI-9605-SS	Mini - Surface mount - Stainless Steel
STI-9609	High profile - Flush mount

STI-9609-SS	High profile - Flush mount - Stainless Steel
STI-9610	High profile - Surface mount
STI-9712	Photoelectric - Surface mount
STI-9713	Photoelectric - Flush mount

STI-9601   **STI-9604-SS**

PIR GUARDS

STI-9618	Corner Mount
STI-9619	Corner Mount
STI-9620	6.25 x 4 x 2.25″
STI-9621	7 x 5.75 x 4.50″
STI-9622	8.75 x 4 x 3.75″

STI-9618   **STI-9621**

EXIT SIGN WIRE CAGES

STI-9640	10.5 x 13.75 x 2.75″
STI-9740	15.5 x 20.5 x 6″

STI-9640

EMERGENCY LIGHT CAGES

STI-9641	10.7 x 14.6 x 4″
STI-9644	8.7 x 17.7 x 5″
STI-9645	13.8 x 21.7 x 5.9″
STI-9649	10.75 x 24.75 x 11.25″
STI-9703	5 x 13.5 x 4″

STI-9649

BEAM SMOKE DETECTORS

STI-9623	For DS240 and DS241
STI-9624	For Fireray 50/100R
STI-9625	For System Sensor Beam Smoke Detector 6424
STI-9706	Flush Mount
STI-9707	Surface Mount

STI-9624   **STI-9625**

CLOCK/BELL WIRE CAGES

STI-9631	10.5″ Diameter
STI-9631-SS	10.5″ Diameter – Stainless Steel
STI-9631-R	10.5″ Diameter – Red
STI-9632	16.5 Diameter
STI-9632-SS	16.5 Diameter – Stainless Steel
STI-9633	20″ Diameter

STI-9632

BAY LIGHT WIRE CAGES

STI-9702	For Hubbell® Superbay Lights – 21.43 x 22.50″
STI-9709	For Hubbell® Superbay Lights – 24.5 x 26″

STI-9702

BEACON & SOUNDER CAGES

STI-9614	7.9 x 6″
STI-9615	3.7 x 3.5″
STI-9617	5.9 x 4.9″
STI-9664	3.86 x 6.18″
STI-9665	7 x 8.43″

STI-9615   **STI-9664**

MISCELLANEOUS WIRE CAGES

STI-9651	Fluorescent Light Damage Stopper®
STI-9705	Horn/Strobe/Speaker Damage Stopper® – Flush
STI-9708	Horn/Strobe/Speaker Damage Stopper – Surface
STI-9711	Horn/Strobe/Speaker Damage Stopper – Flush
STI-9714	Horn/Strobe/Speaker Damage Stopper – Surface
STI-9717	Speaker/Strobe Damage Stopper® – Flush

STI-9720	Speaker Strobe Damage Stopper® – Surface
STI-9730	Wire Guard Damager Stopper®
STI-9796	Outdoor Light Damage Stopper®
STI-9880	Fluorescent Lighting Damage Stopper® – Small
STI-9881	Fluorescent Lighting Damage Stopper® – Large

STI-9705   **STI-9796**   **STI-9880**